Li-Eco series

Lithium Iron Phosphate Battery


Overview

VOLTAI

The VOLTAI-12.8V200Ah rechargeable lithium battery is optimized for low rate application which requires high energy density.

Features

- LiFePO4 battery, more stable and safe .
- Intelligent BMS equipped inside to maintain the battery always work at best condition .
- Max. charge and discharge current as 150A which is specially designed for solar energy.
- With equalizer can balance each lithium cell voltage difference as small as 0.05V in a very short time.
- It can be connected in series to 24V, 36V, 48V.
- Excellent standby self-consumption as low as 4mA .
- Automatically output cut off after 30days no charge and discharge to ensure security , also can cut off output by manual operation .

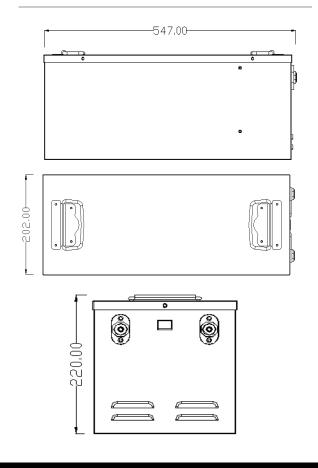

Battery Specification

Nominal Characteristics	
Nominal Voltage /V	12.8
Nominal Capacity /Ah (25° C , 0.2C)	200
Mechanical characteristics	200
Weight (approximate)/Kg	31.0
Dimension L*W*H /mm	547*202*220
Terminal	M8
Electrical characteristics	
Voltage window/V	11.2 to 14.6
Float charge voltage/V	14.0
Max. continue discharge current/A	100
Max. pulse discharge current/A	150A 30Sec.
Max. continue charge current/A	100
Operating conditions	
Cycle life (+25°C 0.2C 100%DOD)	> 1500 Cycles
Operating temperature	Discharge −10°C to 50°C Charge 0°C to 50°C
Storage temperature	0 to 30℃
Storage duration	6 months at 25°C
Safety standard	UN38.3,MSDS
IP Degree	IP20
Dis charge curves under diffemet tempertatures	Cycle life vervus DOD and temperture at 0.2C
16 152 144 144 128 128 128 128 128 128 128 128 128 144 100,420 10,	4000 2500
Capacity in %	Depth of Discharge (%DOD)
0.2C CC-CV charge charavteristic	Self-discharge characteristic
16 15 14 13 12 11 10 0 0 0 0 0 0 0 0 0 0 0 0 0	110 100 90 90 90 90 90 90 90 90 90

0 20 40 60 80 100 120 Charge capacity/Discharing capacity(%)

Storage time (months)

6 8 10 12 14 16 18 20 22 24

()